



# 2DD1621T


NPN SURFACE MOUNT TRANSISTOR

## Features

- Epitaxial Planar Die Construction
- Ideally Suited for Automated Assembly Processes
- Ideal for Medium Power Switching or Amplification Applications
- Lead Free By Design/RoHS Compliant (Note 1)
- "Green" Device (Note 2)

# **Mechanical Data**

- Case: SOT89-3L
- Case Material: Molded Plastic, "Green" Molding Compound.
  UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Finish Matte Tin annealed over Copper leadframe (Lead Free Plating). Solderable per MIL-STD-202, Method 208
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.072 grams (approximate)

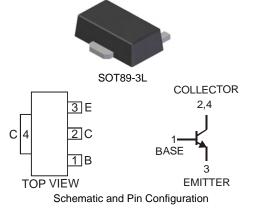

## **Maximum Ratings** $@T_A = 25^{\circ}C$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V <sub>CBO</sub>	30	V
Collector-Emitter Voltage	V <sub>CEO</sub>	25	V
Emitter-Base Voltage	V <sub>EBO</sub>	6.0	V
Collector Current	Ι <sub>C</sub>	2.0	А

# **Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 3) @ $T_A = 25^{\circ}C$	PD	1	W
Thermal Resistance, Junction to Ambient Air (Note 3) $@T_A = 25^{\circ}C$	$R_{ ext{ heta}JA}$	125	°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C

# Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

			_		1	
Characteristic	Symbol	Min	Тур	Max	Unit	Test Conditions
OFF CHARACTERISTICS (Note 4)						
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	30	—	_	V	$I_{C} = 10 \mu A, I_{E} = 0$
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	25			V	$I_{C} = 1mA, I_{B} = 0$
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	6.0	—	_	V	$I_{C} = 10 \mu A, I_{C} = 0$
Collector-Base Cutoff Current	I <sub>CBO</sub>	_	_	100	nA	$V_{CB} = 20V, I_E = 0$
Emitter-Base Cutoff Current	I <sub>EBO</sub>	_	_	100	nA	$V_{EB} = 4.0V, I_{C} = 0$
ON CHARACTERISTICS (Note 4)	·					
DC Current Gain	h	200	—	400		$V_{CE} = 2.0V, I_{C} = 0.1A$
	IIFE	h <sub>FE</sub> 65 —				$V_{CE} = 2.0V, I_{C} = 1.5A$
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	_	0.12	0.4	V	I <sub>C</sub> = 1.5A, I <sub>B</sub> = 75mA
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>		0.9	1.2	V	I <sub>C</sub> = 1.5A, I <sub>B</sub> = 75mA
SMALL SIGNAL CHARACTERISTICS						
Current Gain-Bandwidth Product	fT	_	300	—	MHz	$V_{CE} = 10V$ , $I_C = 50mA$ , f = 100MHz
Output Capacitance	Cobo		16	_	pF	$V_{CB} = 10V, I_E = 0, f = 1MHz$
SWITCHING CHARACTERISTICS						
Turn On Time	t <sub>on</sub>		70		ns	
Storage Time	t <sub>stg</sub>		170	_	ns	$V_{CE} = 12V, V_{BE} = 5V,$ $I_{B1} = I_{B2} = 25mA, I_C = 500mA$
Fall Time	t <sub>f</sub>	_	25		ns	$B_1 = B_2 = 2500A, IC = 50000A$

1. No purposefully added lead.

2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.


3. Device mounted on FR-4 PCB; pad layout as shown on page 4 or in Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.


4. Measured under pulsed conditions. Pulse width =  $300\mu$ s. Duty cycle  $\leq 2\%$ .

Notes:




NEW PRODUCT

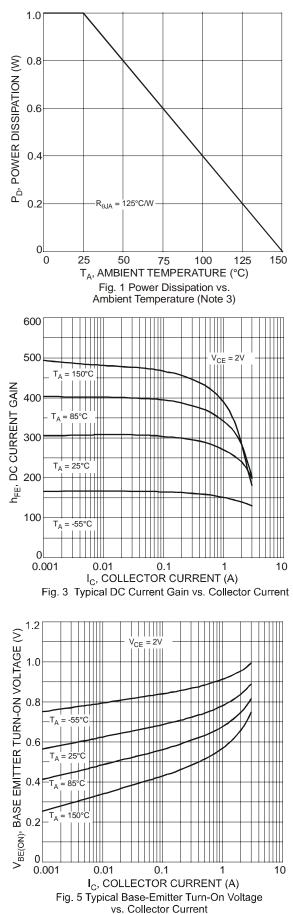

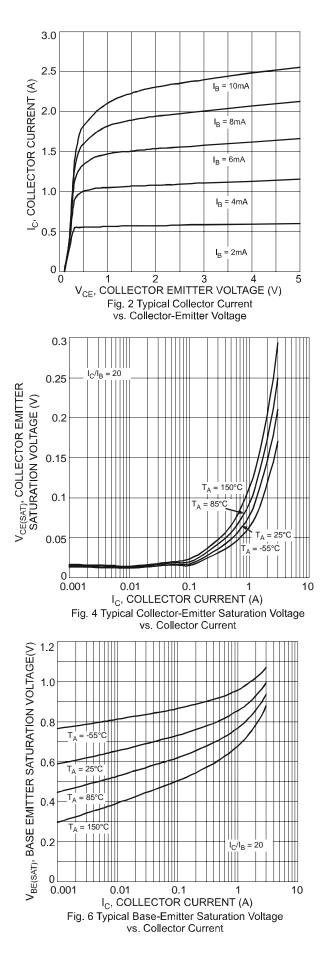




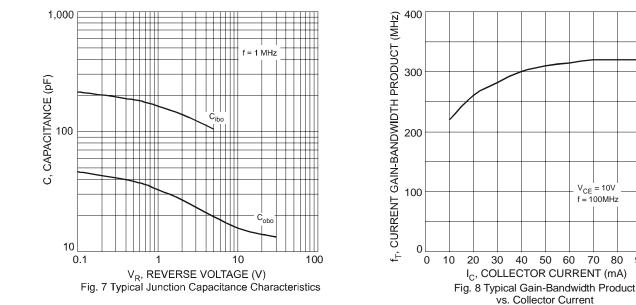


# Ordering Information (Note 5)


Device	Packaging	Shipping
2DD1621T-13	SOT89-3L	2500/Tape & Reel

5. For packaging details, go to our website at http://www.diodes.com/ap02007.pdf. Notes:

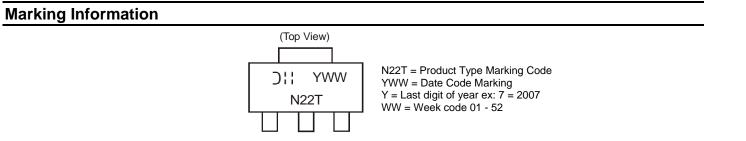

# **Package Outline Dimensions**

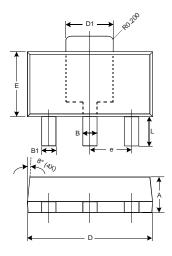

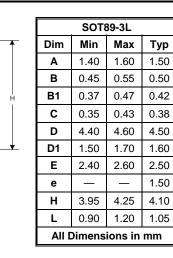

DS31240 Rev. 2 - 2

V<sub>CE</sub> = 10V f = 100MHz


70 80

90 100

60



## **Suggested Pad Layout**



#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.